
BATCHMASTER LONG

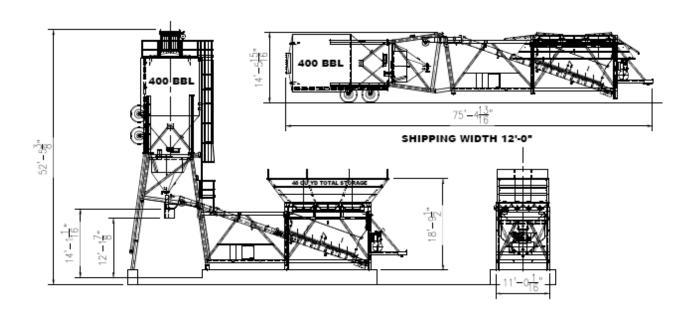

SPECIFICATIONS

PRODUCTION CAPACITY:

Theoretical Cycle Time - 2.5 to 3 minutes

BATCHER CAPACITY:

Aggregate - 1 to 12 cubic yards (1 to 9.2 cubic meters) Cement - 1 to 12 cubic yards (1 to 9.2 cubic meters) Scales - Direct Load Cells

AGGREGATE DISCHARGE CONVEYOR:

30" wide (762 mm), 10 horsepower drive. Optional 36" (914 mm), 15 horsepower.

CEMENT AERATION:

5 horsepower, high volume, low pressure blower.

HIGH PRESSURE AIR COMPRESSOR:

10 horsepower, 120 gallon (0.45 cubic meters). Optional 15 or 20 horsepower, 120 gallon (0.45 cubic meters).

ELECTRICAL:

460 volt, 3-phase with 120 VAC transformer for control voltage. All motors are TEFC. All motor circuit wiring protected by individual circuit breakers. Electrical components housed in NEMA steel enclosures. Wiring in conduit.

BATCH CONTROL SYSTEM:

Semi-automatic cut-off of cement by presets on digital readouts. Push-Button for electric over air on gates. Optional fully automatic computerized batch control system.

WATER METER:

3" diameter (77 mm) with up to 500 gallons (1,740 liters) per minute

TRANSPORTATION SYSTEM:

Four (4) 315/80R 22.5 tires, wheels, air brakes, tail and brake lights, and fifth wheel rub plate with king pin.

STORAGE BIN CAPACITIES:

AGGREGATE HEAPED VOLUME

48 TO 200 cubic yards 37 to 153 cubic meters

CEMENT I GROSS VOLUME

1,600 to 4,260 cubic feet 45 to 121 cubic meters

CEMENT II GROSS VOLUME

1,600 to 4,260 cubic feet 45 to 121 cubic meters

DIMENSIONS:

SHIPPING DIMENSIONS:

Length 75'-5" (22,987 mm)
Height 14'-6" (4,419 mm)
Width 12'-0" (3.658 mm)

Shipping Volume 13,122 cubic feet (371 cubic meters)